


MarkLED Exit

LED GUIDANCE + EVACUATION LIGHTING



- LED guidance for safe traffic
- Evacuation lighting in case of emergency
- Powersaving LED technology
- LED lifetime >50'000 hours
- Stepless dimmable guidance light
- Suitable for shoulder or wall mounting

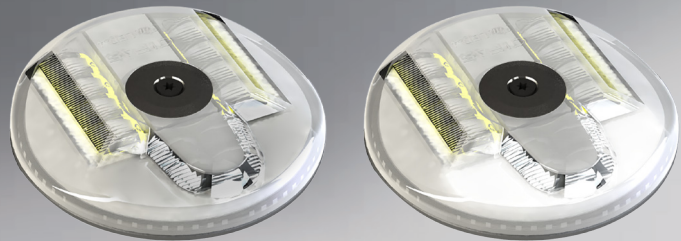

Guidance + Evacuation

combined in 1 unit

MarkLED EXIT

LED GUIDANCE + EVACUATION LIGHTING




Technical data:

- Power supply: 16 – 48VDC
- Housing colour: transparent
- Dimension: Ø 110 mm, height 68 mm
- Upper part: polycarbonate transparent
- Lower part: glass fiber reinforced polyamid, black
- Level above road: 24 mm
- IP rating: IP68
- Protection class: III
- LED colour: white (5'700K)
- Temperature resistance: -35°C to +45°C
- Weight: ca. 125g
- Load capacity: B125 (occasionally drive over)


- | | Guidance | Evacuation |
|----------------------|-------------|-------------|
| • Light output: | 240lm | 660lm |
| • LED's: | 4 + 4 | 4 |
| • Power consumption: | 120mA@24VDC | 210mA@48VDC |




Wall-mounted

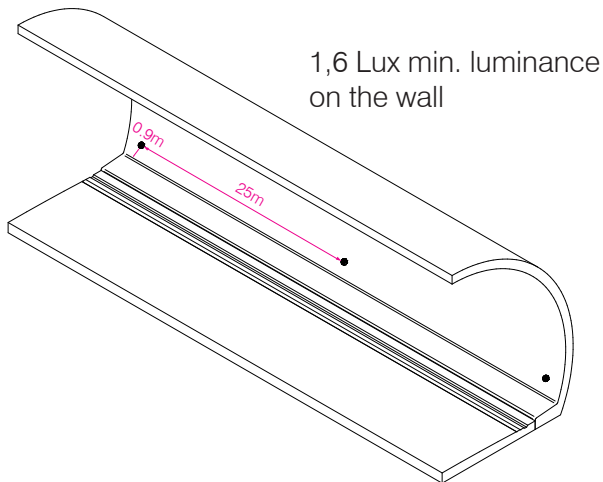

Shoulder-mounted

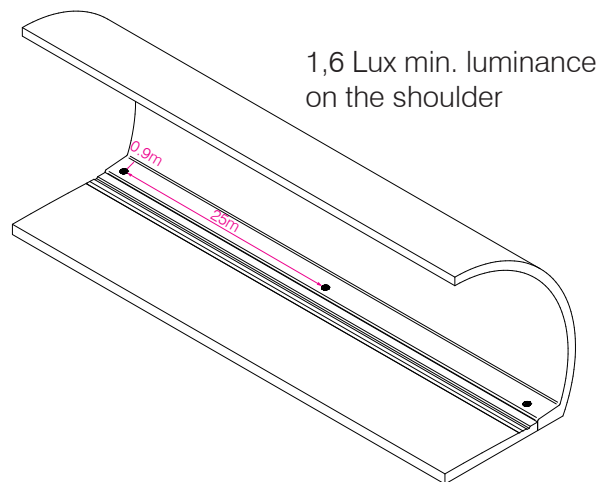

LED guidance

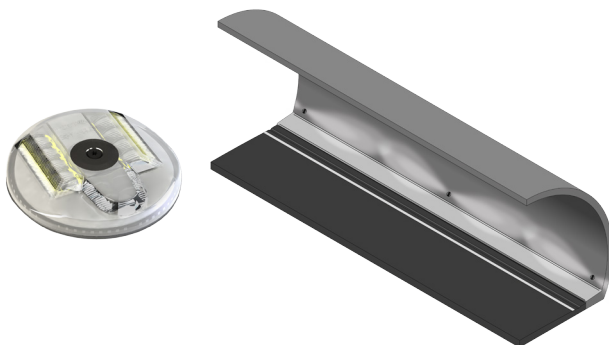

Evacuation lighting

